

EPSON[®]
EXCEED YOUR VISION



Epson **TM-P60** Series

Wireless receipt and label printers
for retail and logistics



Getting your business moving is now even easier with our TM-P60 mobile thermal printer. Compact, lightweight and easy-to-use, it offers uninterrupted, high-speed, receipt and label printing on-the-go, so you can provide a fast, more efficient service anytime, anywhere.

Whether you need a receipt or label printer for retail, hospitality or in the warehouse, our wireless TM-P60 has all the features and functionality you need. From fast-food outlet to supermarket, leisure centre to warehouse, the TM-P60 brings flexibility and convenience.

Great features go mobile

Offering all the functionality of our world renowned TM-T88 printer, the fully-portable TM-P60 includes high-resolution graphics, barcodes and exclusive new fonts. It's perfect for producing sophisticated receipts, coupons, tokens and for on-demand labelling. With easy-to-use features such as drop-in paper load for hassle-free operation, partial auto-cutter to prevent paper jams, and ultra-fast thermal technology – we have brought speed and quiet printing to the wireless world.

Our wireless printer's compact, ruggedised and robust design means it can stand up to even the most challenging and harshest environments. And, with the TM-P60 series you have a choice of interfaces. For even more flexibility and convenience, both receipt and label models are available in WiFi, and the receipt version is also offered with Bluetooth.

Uninterrupted, high-performance printing

Unlike other wireless printers, the TM-P60 range – with an impressive 70 millimetres per second print speed – features a long-life 8 hour battery, easily recharged internally or by external charger. This means you can rely on uninterrupted, continuous performance by simply replacing batteries as necessary, rather than having to recharge the whole unit.



Unlimited applications

With the TM-P60 the possibilities are endless. Use it in conjunction with a PDA for queue-busting transactions and create extra checkouts during peak trading times or for promotions. Bring the point of sale to your customer for instant transactions while reducing their security and fraud concerns. And, to offer your customers greater freedom and independence, it can even be trolley mounted. The TM-P60 label printer, with its automatic peeling mechanism, is an ideal choice for shelf-edge labelling and mark-downs on demand.

The TM-P60 is also the key to greater efficiency in the warehouse. Hand-held or mounted on a belt, it enables you to print fast, clear data and barcodes in logistics and distribution environments, helping you to streamline your operation.

Ready-to-go, secure and reliable


Ensuring compatibility with your existing retail systems, TM-P60 series comes complete with OPoS, JPoS, ESC/POS and Windows drivers. Plus, we've also added industry standard wireless security protocols so you can be confident of secure wireless data communications. Quite simply, the TM-P60 offers flexible, high-speed printing, labelling, network support and extremely low cost of ownership with superior reliability.

For additional peace of mind, we offer CoverPlus, our advanced extended warranty service. Providing free access to technical support, as well as a repair and replacement facility, CoverPlus extends the one year back-to-base guarantee on all of our point of sale printers to give three years' protection. Low risk and low cost, CoverPlus enables your business to be fully operational at all times and helps you to avoid costly downtime.



Epson **TM-P60** series

Receipt / Continuous label

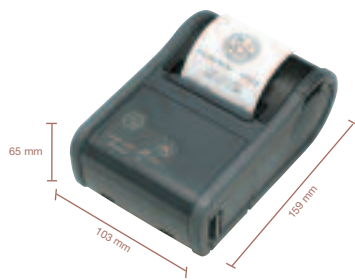

Die-cut label and receipt printer



Print method	Direct thermal line	Direct thermal line
Print density	203 x 203 dpi	203 x 203 dpi
Print font	12 x 24 or 10 x 24 or 8 x 16	12 x 24 or 10 x 24 or 8 x 16
Column capacity		
58mm paper	35 or 42 or 52 columns	35 or 42 or 52 columns
60mm paper	36 or 43 or 54 columns	36 or 43 or 54 columns
Character size (mm)	1.50(w)x3.0(h) / 1.25(w)x3.0(h) / 1.0(w)x2.0(h)	1.50(w)x3.0(h) / 1.25(w)x3.0(h) / 1.0(w)x2.0(h)
Character set	95 Alphanumeric, 48 International 128 x 10 graphic, 128 x 1 space page	95 Alphanumeric, 48 International 128 x 10 graphic, 128 x 1 space page
Bar codes	UPC-A, UPC-E, JAN 8 (EAN), JAN13 (EAN) CODE 39, CODE 93, CODE128, ITF, CODABAR PDF 147, QR CODE, MAXI CODE	UPC-A, UPC-E, JAN 8 (EAN), JAN13 (EAN) CODE 39, CODE 93, CODE128, ITF, CODABAR PDF 147, QR CODE, MAXI CODE
Characters per inch	16 / 20 / 25 cpi	16 / 20 / 25 cpi
Print speed	Up to 80mm / sec	Up to 80mm / sec
Internal buffer		
Data buffer	128 bytes	128 bytes
NV RAM	384KB	384KB
Page mode	63KB	63KB
Interfaces	IEEE 802.11b / RS 232 or Bluetooth / RS 232	IEEE 802.11b / RS 232
Paper specification		
Dimensions	57.5 ± 0.5mm x 51mm or 59.5 ± 0.5 x 51mm Optional width settings	57.5 ± 0.5mm x 51mm or 59.5 ± 0.5 x 51mm Optional width settings
Thickness	0.05mm to 0.08mm	0.05mm to 0.08mm
Spool outside diameter	>18mm	>18mm
Paper type	Receipt and continuous labels	Die cut labels and receipt
Power supply		
External A/C adapter	PS10 12v output	PS10 12v output
Internal battery	Li-ion LIP 2500 7.4VDC @ 2200mAh	Li-ion LIP 2500 7.4VDC @ 2200mAh
Battery life	IEEE 802.11b version 8 hrs Bluetooth version up to 20hrs	IEEE 802.11b version 8 hrs
Battery charging	On board using PS10 – 4 hrs External rapid charger option	On board using PS10 – 4 hrs External rapid charger option
Reliability		
MTBF	120,000 hrs	120,000 hrs
MCBF	16 million lines	16 million lines
Thermal head	100 million pulses	100 million pulses
Printer life	50km of 0.80mm printed paper	50km of 0.80mm printed paper
Operating temperature	0 to 50° C	0 to 50° C
Acoustic noise	approx 53db (ANSI bystander position)	approx 53db (ANSI bystander position)
Overall dimensions	103mm(w) x 159 mm(d) x 65 mm(h)	103mm(w) x 159 mm(d) x 65 mm(h)
Mass	0.67kg including battery	0.67kg including battery
EMC standard	EMI: FCC / ICES-003 class B	EMI: FCC / ICES-003 class B
Safety standard	UL60950, CSA C22.2 no 60950, CE	UL60950, CSA C22.2 no 60950, CE



For further information on current promotions or Epson RTD products please contact +44 (0)1442 227222 or visit www.pos.epson.co.uk