

# Air-cylinder tooling

## Available sizes according to Stork standard

Stork Type	ø in mm	Stork Type	ø in mm	Stork Type	ø in mm	Stork Type	ø in mm
0170	047.863	0550	168.820	0900	279.979	*1260	394.570
0200	057.412	0560	172.004	0910	283.162	*1270	397.754
0210	060.595	0570	175.187	0920	286.345	*1280	400.937
0220	063.778	0580	178.370	0930	289.528	1290	404.120
0230	066.961	0590	181.553	0940	292.711	1300	407.303
0240	070.144	0600	184.736	0950	295.894	*1310	410.486
0250	073.327	0610	187.919	0960	299.077	*1320	413.669
0260	076.511	0620	191.102	0970	302.261	*1330	416.852
0270	079.694	0630	194.285	0980	305.444	1340	420.035
0280	082.877	0640	197.468	0990	308.627	*1350	423.218
0290	086.060	0650	200.651	1000	311.810	*1360	426.401
0300	089.243	0660	203.835	*1010	314.993	*1370	429.585
0310	092.426	0670	207.018	1020	318.176	*1380	432.769
0320	095.609	0680	210.201	1030	321.359	*1390	435.951
0330	098.792	0690	213.384	1040	324.542	1400	439.134
0340	101.975	0700	216.567	1050	327.725	*1410	442.317
0350	105.158	0710	219.750	1060	330.908	1420	445.500
0360	108.342	0720	222.933	1070	334.092	*1430	448.683
0370	111.525	0730	226.116	1080	337.275	1440	451.866
0380	114.708	0740	229.299	1090	340.458	*1450	455.049
0390	117.891	0750	232.482	1100	343.641	*1460	458.232
0400	121.074	0760	235.666	1110	346.824	*1470	461.416
0410	124.257	0770	238.849	1120	350.007	*1480	464.599
0420	127.440	0780	242.032	1130	353.190	*1490	467.782
0430	130.623	0790	245.215	1140	356.373	1500	470.965
0440	133.806	0800	248.398	1150	359.556	*1510	474.148
0450	136.989	<sup>1</sup> 0810	251.331	1160	362.739	*1520	477.331
0460	140.173	<sup>2</sup> 0810	251.581	*1170	365.923	1530	480.514
0470	143.356	0820	254.514	1180	369.106	*1540	483.697
0480	146.539	0830	257.697	*1190	372.289	*1550	486.880
0490	149.722	0840	260.880	1200	375.472	*1560	490.063
0500	152.905	0850	264.063	*1210	378.655	*1570	493.247
0510	156.088	0860	267.247	*1220	381.838	*1580	496.430
0520	159.271	0870	270.430	1230	385.021	*1590	499.613
0530	162.454	0880	273.613	1240	388.204	1780	560.092
0540	165.637	0890	276.796	1250	391.387		


<sup>1,2</sup> For this size both diameters are commonly available in the market.

\* Please contact Flint Group Flexographic Products.

# Metal-reinforced notches


## Available metal-reinforced notches\*

Other shapes are available without metal-reinforcement.

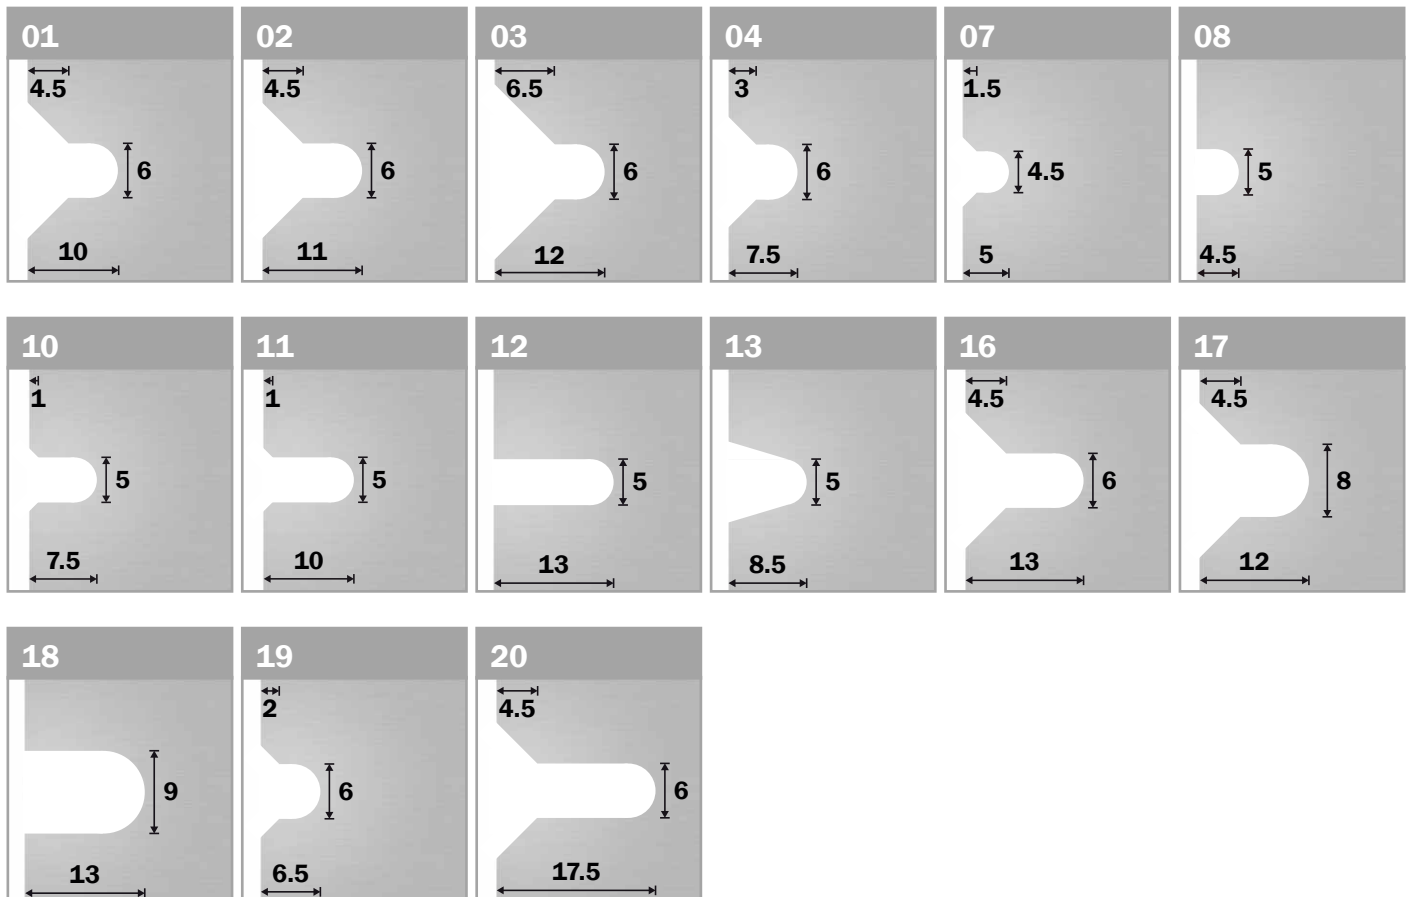

The interlock notches are suitable for the following adapters:

- rotec® Unifit Adapter
- rotec® H/C Unifit Adapter
- rotec® Bridge Adapter
- rotec® H/C Bridge Adapter

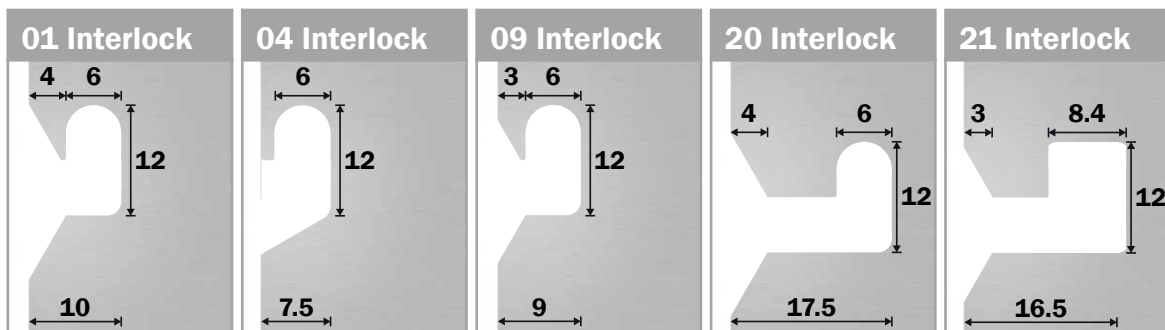

\* Sizes in mm

You are welcome to contact us for further information.

**Flint Group Flexographic Products**  
 Solmsstraße 83  
 48683 Ahaus  
 Germany

T +49 711 9816-301  
 F +49 711 9816-801  
 info.flexo@flintgrp.com  
 www.flintgrp.com

All information in this document is based on our present knowledge and experience at the time of printing. Due to the multitude of factors influencing the processing and application of our products, it does not exempt the user from testing and calibrating. Nor does it imply any legally binding assurance concerning specific properties of the products or the suitability for a particular application. The responsibility of observing any possible industrial property rights, laws and regulations is the obligation of the user. Subject to technical changes without prior notice. Names marked ® are registered trademarks of Flint Group.